




PARAMETERS:

L0 - EP
F0 - 50
DL :
-LEFT OPENING = E -
-RIGHT OPENING = - -
So - 10
Sc - 10
ro - 5
rc - 5
OE - 1r OR 2r (SINGLE OR DOUBLE GP)
CE - 2r OR 3r (SINGLE OR DOUBLE GP)

FAAC 746C & 844C STANDARD
E781 CONTROLLER DIAGRAM

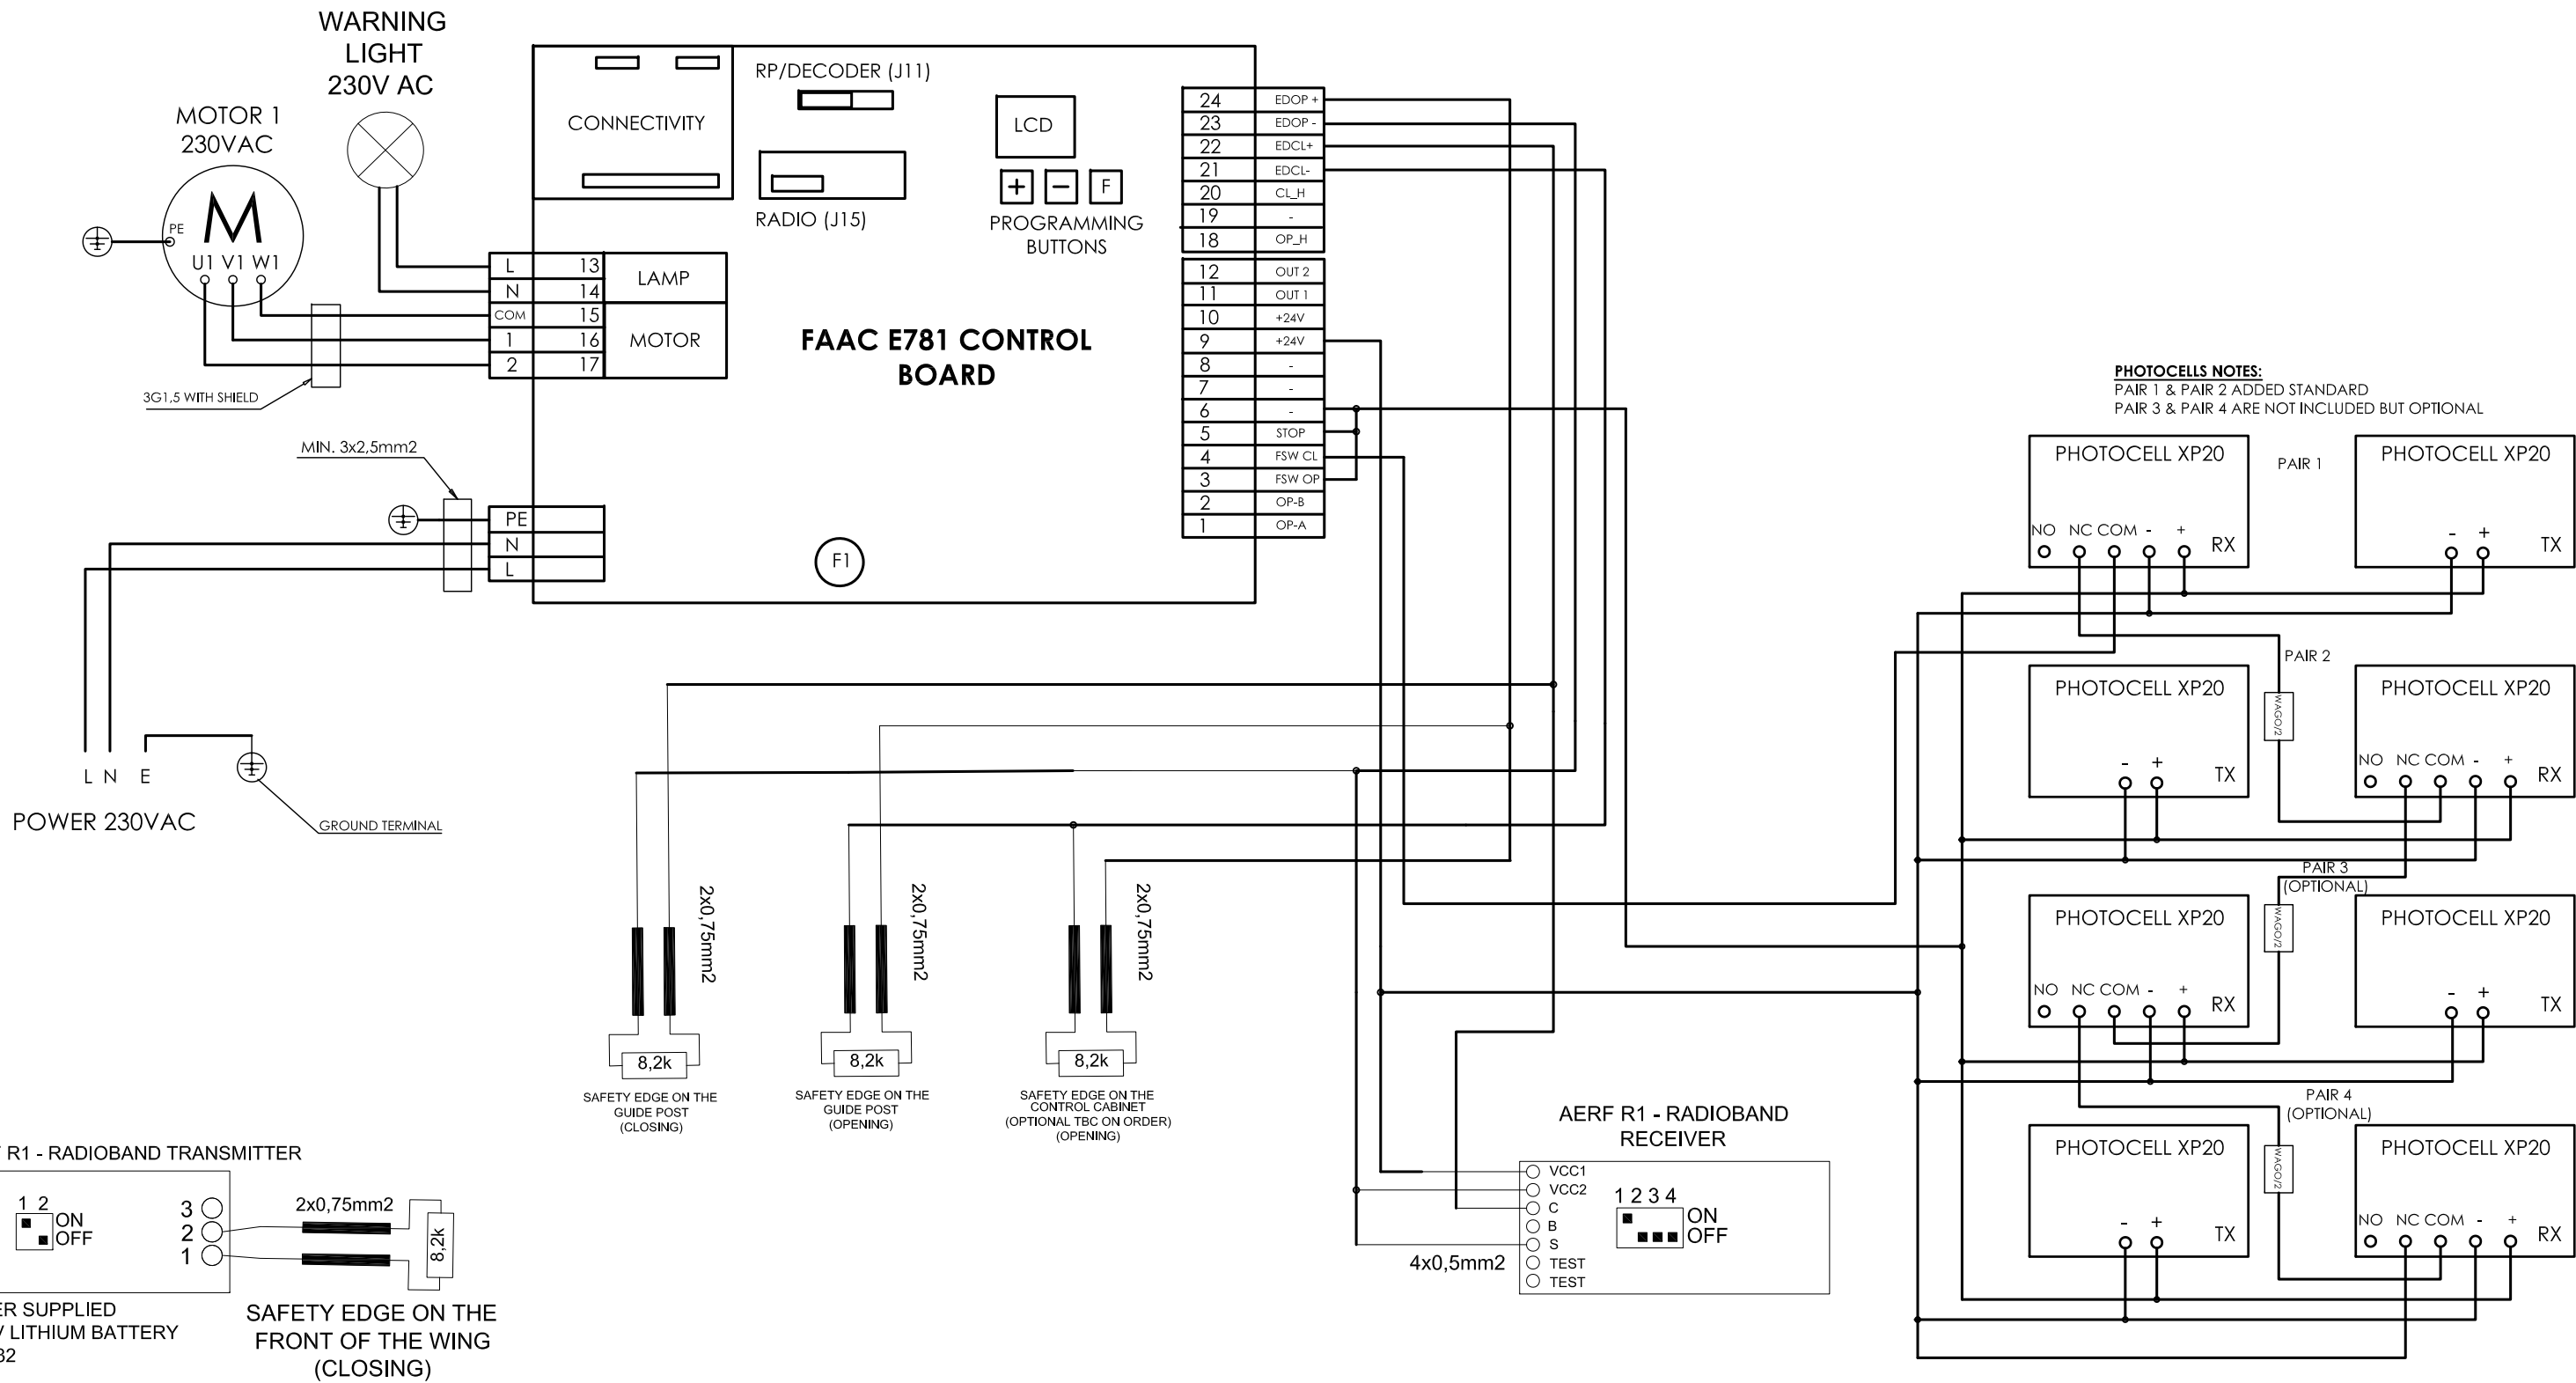

Imraan Thompson

22.07.2024



Free form- and
placetolerances conform
ISO 2768 m

A3

1:20

THIS DRAWING AND THE RELATED INFORMATION IS AND REMAINS THE EXCLUSIVE PROPERTY OF BETAFENCE WITHOUT THE PRIOR WRITTEN CONSENT OF BETAFENCE ,
THIS DRAWING AND THE RELATED INFORMATION MAY NEITHER BE COPIED OR REPRODUCED, NOR COMMUNICATED IN ANY WAY TO A THIRD PARTY, NOR USED FOR
MANUFACTURING OUTSIDE BETAFENCE EACH INFRINGEMENT OF THESE INTELLECTUAL PROPERTY RIGHTS OF BETAFENCE SHALL GIVE RISE TO LEGAL PROCEEDINGS.