



## Nylofor® F

### Panels

The Nylofor F system consists of heavy welded mesh fence panels with horizontal flat wires providing maximum rigidity and an original design.

### Product detail



### **BENEFITS**

#### **High rigidity**

The 15 x 6 mm horizontal flat wires provide high rigidity to the panels.

#### **Modern look**

The use of Nylofor F panels with flat horizontal wires is modern and at the same time very robust.

#### **Long lifetime**

The high quality of the coating ensures a long lifetime. After being zinc coated, the products are protected by a polyester coating with a perfect adhesion.


#### **Quick installation**

The different post systems of Nylofor F guarantee a quick and professional installation.

#### **Complete & versatile system**

The Nylofor F system is a professional system with panels of different heights, in combination with several types of posts and a wide assortment of swing and sliding gates of the type Robusta.

### Security level

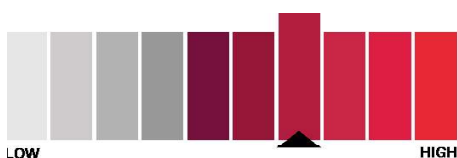

### Applications



### Functionalities



## Post and fixing systems



### Nylofor - Twilfix post system

The panels are fixed on the front side of the posts by means of fixators and security bolts. The welded square tubular posts (60 x 60 mm) have inserts for fixing the panels and are covered with a plastic cap. For installation higher than 2.40 m, post section can be 80x60 or 120x60



### Bekafix and Bekafix Ultra post system

The panels are fixed laterally onto the posts and secured with anti-vandal metal security fixators. The H-shape welded tubular posts (70 x 44 mm), are galvanised and PES coated and supplied complete with a polyamide cap and accessories.



### E-LOX system

Welded rectangular tubular posts (60 x 40 x 1,5 mm) with pre-drilled holes for fixing the corresponding screw hooks M8 with snap-off nut and plastic cap. A flexible post distance results in a fast installation.



### D-LOX post system

The panels are fixed on to the front side of the posts, they are first hung in the premounted metal clamps.

## Panels

The panels are 2500 mm width and in a range of heights: 630 to 2430 mm. The mesh dimensions are 200 x 50 mm. The panels have barbs of 30 mm on top. The galvanised wires are extra heavy: the horizontal wires are 15 x 6 mm, the vertical wires have a diameter of 5 mm.

## Gates

The Nylofor F system is completed by the secure and high technology gates type Robusta: single or double swing or sliding gates.

## Coating technique

Panels made out of galvanised wires. An adhesion coating is given for a perfect adhesion with the polyester coating (min. 100 micron).



## Colours

Green RAL 6005 and RAL 7016.  
Other RAL colours on request.

## ASSORTMENT NYLOFOR F

Height fence mm	Dimensions panels width x height - mm
630	2500 x 630
830*	2500 x 830
1030	2500 x 1030
1230	2500 x 1230
1430	2500 x 1430
1630	2500 x 1630
1830	2500 x 1830
2030	2500 x 2030
2230	2500 x 2230
2430	2500 x 2430

\* not available in green RAL 6005

Europe  
Blokkestraat 34b  
B-8550 Zwevegem  
Tel: B: +32 56 73 46 46  
Tel: NL: 0800 022 76 98

USA  
3309 SW Interstate 45  
Ennis,  
TX 75119  
Tel: +1 972 878 7000

Middle East  
P.O. Box 293517 DAFZA,  
Building E 5, Block A  
8th Floor, Office 802  
Tel: +971 04 6091122

Africa  
B10, Bergriver Business Park  
Paarl,  
7646  
Tel: +27 021 868 7300

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand, Betafence is part of a global network, working alongside Guardiar and Hesco as a leader in perimeter security systems and solutions. For more information please visit [praesidiad.com](http://praesidiad.com).

**BETAFENCE**  
Securing What Matters

[betafence.com/contact](http://betafence.com/contact)